


Image not found or type unknown

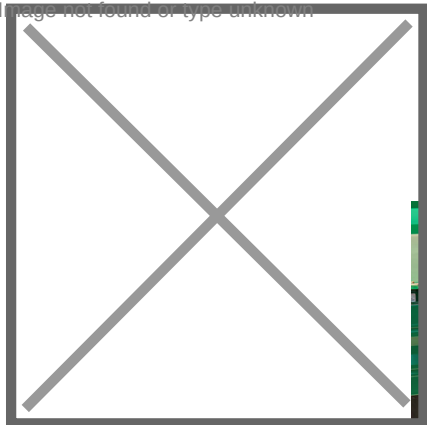

Technical information

Productnumber : 8617001015

Product description

High quality ramp suitable for loading medium to heavy vehicles such as construction machines, garden machines or ride-on mowers, which are equipped with pneumatic tires or rubber tracks. The driving surface is reinforced at the bottom, which significantly extends the life of the driving plates. Weight per driving plate is 80 kg. The load capacity shown is per set!

This ramp is supplied as standard with connection A and a flat floor 1 , see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

Specifications

Article arrangement: New

Version: aluminium 500 cm (pair)

Top: driving area of anti slip profile

Width (mm): 520

Loading capacity (kg): 4210

Type number: AVS-170

Height difference max (mm): 30% with max. height

Max Height (mm): 1460

Type: access ramp straight

Material: aluminium

Length (mm): 5285

Internal width (mm): 400

Weight (kg) 80

Batch (items): 2

Min Height (mm): 1130

EAN Code (Gtin) 8719424127164

Scan the QR code for more information



KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment