

Image not found or type unknown



Technical information

Productnumber : 75.146.686.104



Product description

Transport swivel castor with brake made of pressed sheet steel, plate fitting, grey non-marking thermoplastic rubber tyre, Wheel-Ø 100, 120KG

Wheel: grey non-marking TPR rubber tyre, with polypropylene wheel core, central ball bearing,

Advantages: The solid rubber tyres have a hardness of 85° Shore A and offer good driving characteristics, roll silently, are impact and shock resistant, corrosion resistant and have medium rolling resistance.

Applications: Versatile use for light transport in e.g. offices, warehouses, shops and institutions. Low-noise, impact-resistant and vibration-damping. Swivel castor for light applications. Less suitable for continuous static use under maximum load.

Suitable surface: Flat or slightly uneven. Non-stripping tyre for use on ceramic tiles, linoleum, etc.

Suitable environment : Dry and not permanently damp. With light acids and bases.

Specifications

Article arrangement: New

Version: Ø 100 mm

Top: base plate 105x85 mm

Bolt hole: Ø 9 mm

Surface treatment: galvanized

Width (mm): 36

Loading capacity (kg): 120

Type number: 146686104

Temperature resistance: -20 / +60

Type: castor wheel with brake

Material: thermo rubber

Hole centres: 80x60 mm

Colour: colorless

Length (mm): 100

Height (mm): 128

Wheel bearing: ball bearing

Wheels diameter: 100

Scan the QR code for more information




KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment

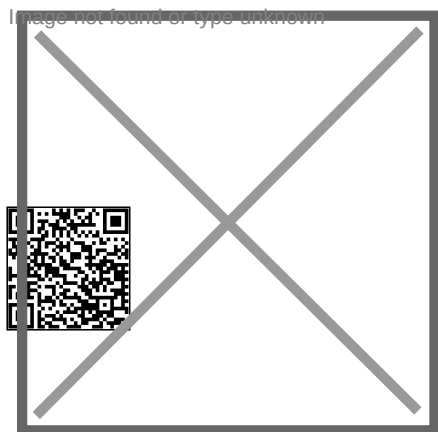

Technical information
Productnumber : 75.146.686.104



KRUIZINGA.NL[®]
Opslag- en transportmiddelen

KRUIZINGA.DE[®]
Lager- und Transportmittel

KRUIZINGA.FR[®]
Stockage et ressources de transport

KRUIZINGA.COM[®]
Material handling equipment