


Image not found or type unknown



Technical information

Productnumber : 75.146.542.263

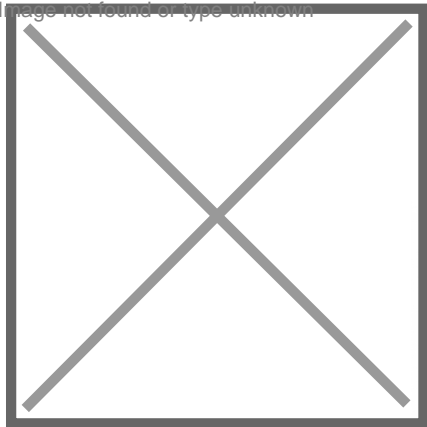

Product description

Industrial pneumatic swivel castors

bracket: pressed steel, double ball recirculation in slewing ring, bright zinc plated, blue passivated, top plate mounting

wheel: pneumatic tire block profile, with wheel center of polyamide, roller bearing,

Benefits: For medium-heavy transport of, for example, shock-sensitive products or on an irregular/unpaved surface surface. Low noise and vibration damping.

Applications: Excellent shock damping. Low rolling resistance on uneven floors. Very floor-saving due to pneumatic tyres.

Suitable surface: Virtually any surface, both indoors and outdoors. Uneven surfaces such as paving stones, damaged floors and obstacles such as thresholds. Unpaved surfaces.

Suitable environment: Dry and not permanently damp. For mild chemicals.

Specifications

Article arrangement: New

Version: Ø 252 mm

Top: base plate 175x140 mm

Bolt hole: Ø 11 mm

Surface treatment: electro-galvanized

Width (mm): 85

Loading capacity (kg): 150

Type number: 755422

Type: castor wheel with brake

Material: Pneumatic tyre

Hole centres: 140x105 mm

Colour: colorless

Length (mm): 260

Height (mm): 290

Wheel bearing: roller bearing

EAN Code (Gtin) 8719424167993

Scan the QR code for more information



KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment